


Dynatec, LLC

SAMPLE: Formula Shell SAE 10W-30 (Lab # 14071622)
Four Ball Wear With Coefficient of Friction

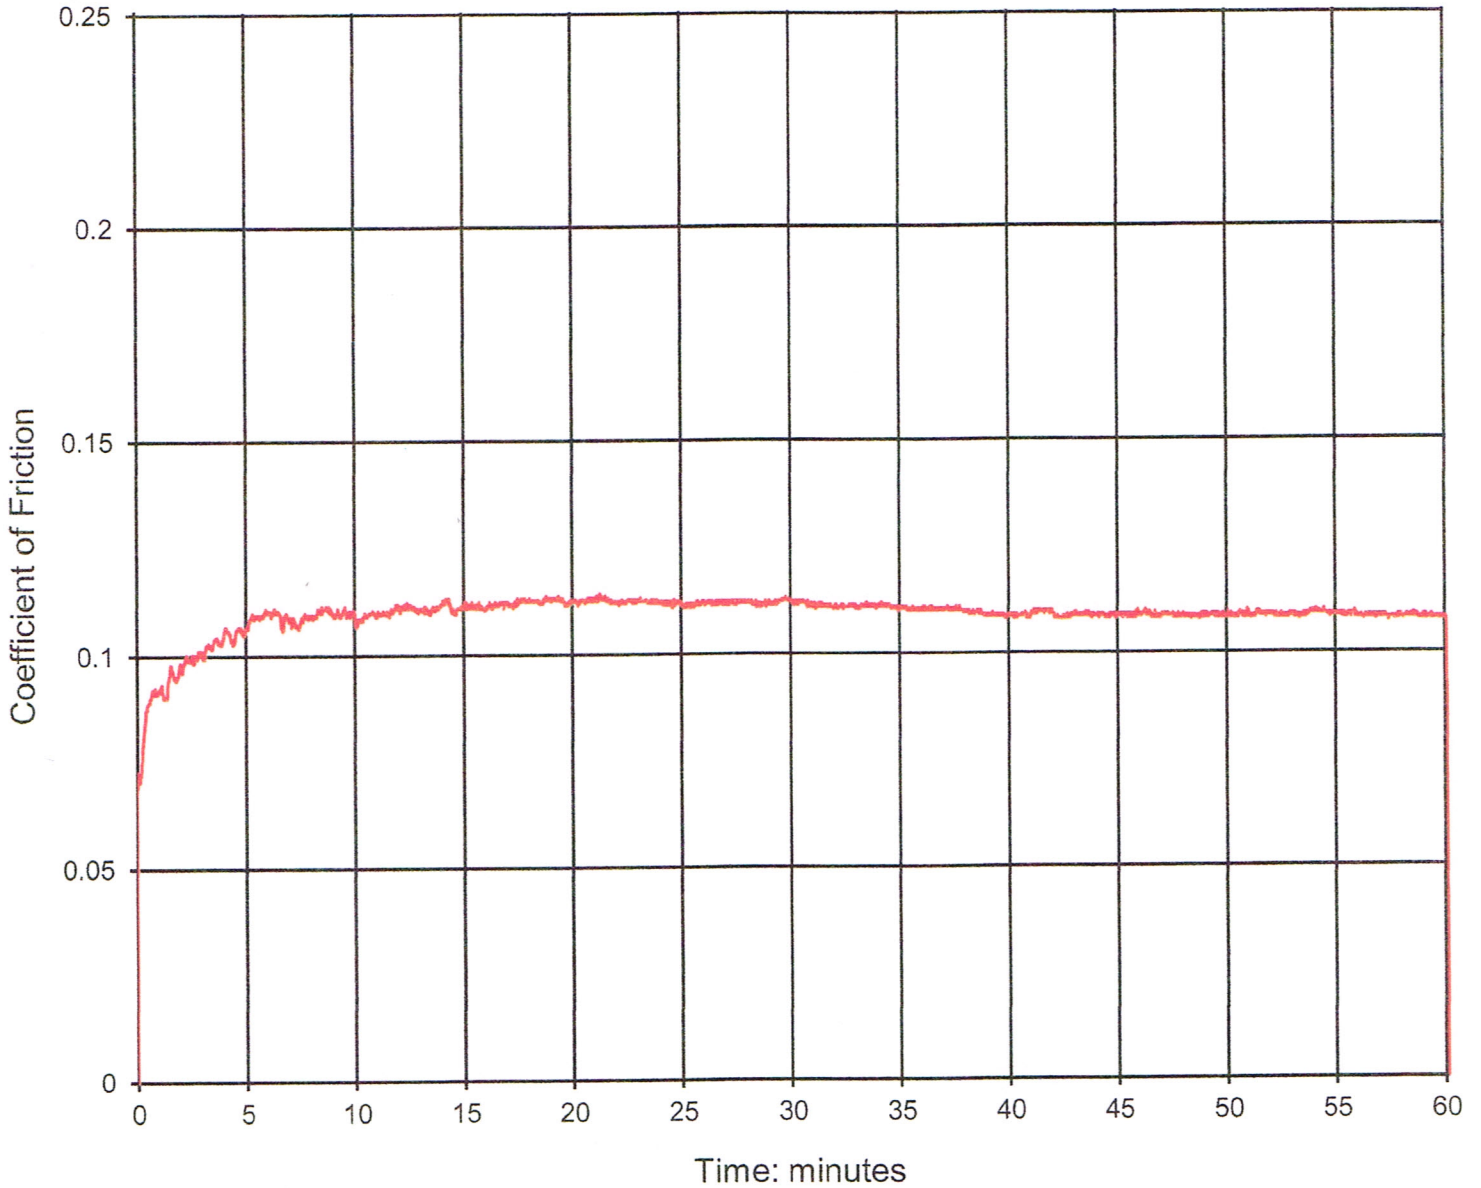

Method ASTM D4172 1200 RPM, 40 kg Load, 75°C, 1 Hour
Wear Scar = 0.47 mm Grand Average = 0.109 Y-O Intercept = 0.107