


## Dynatec, LLC

SAMPLE: Mobil 1 15W50 (Neat) (Lab# 17091306)  
Four Ball Wear With Coefficient of Friction

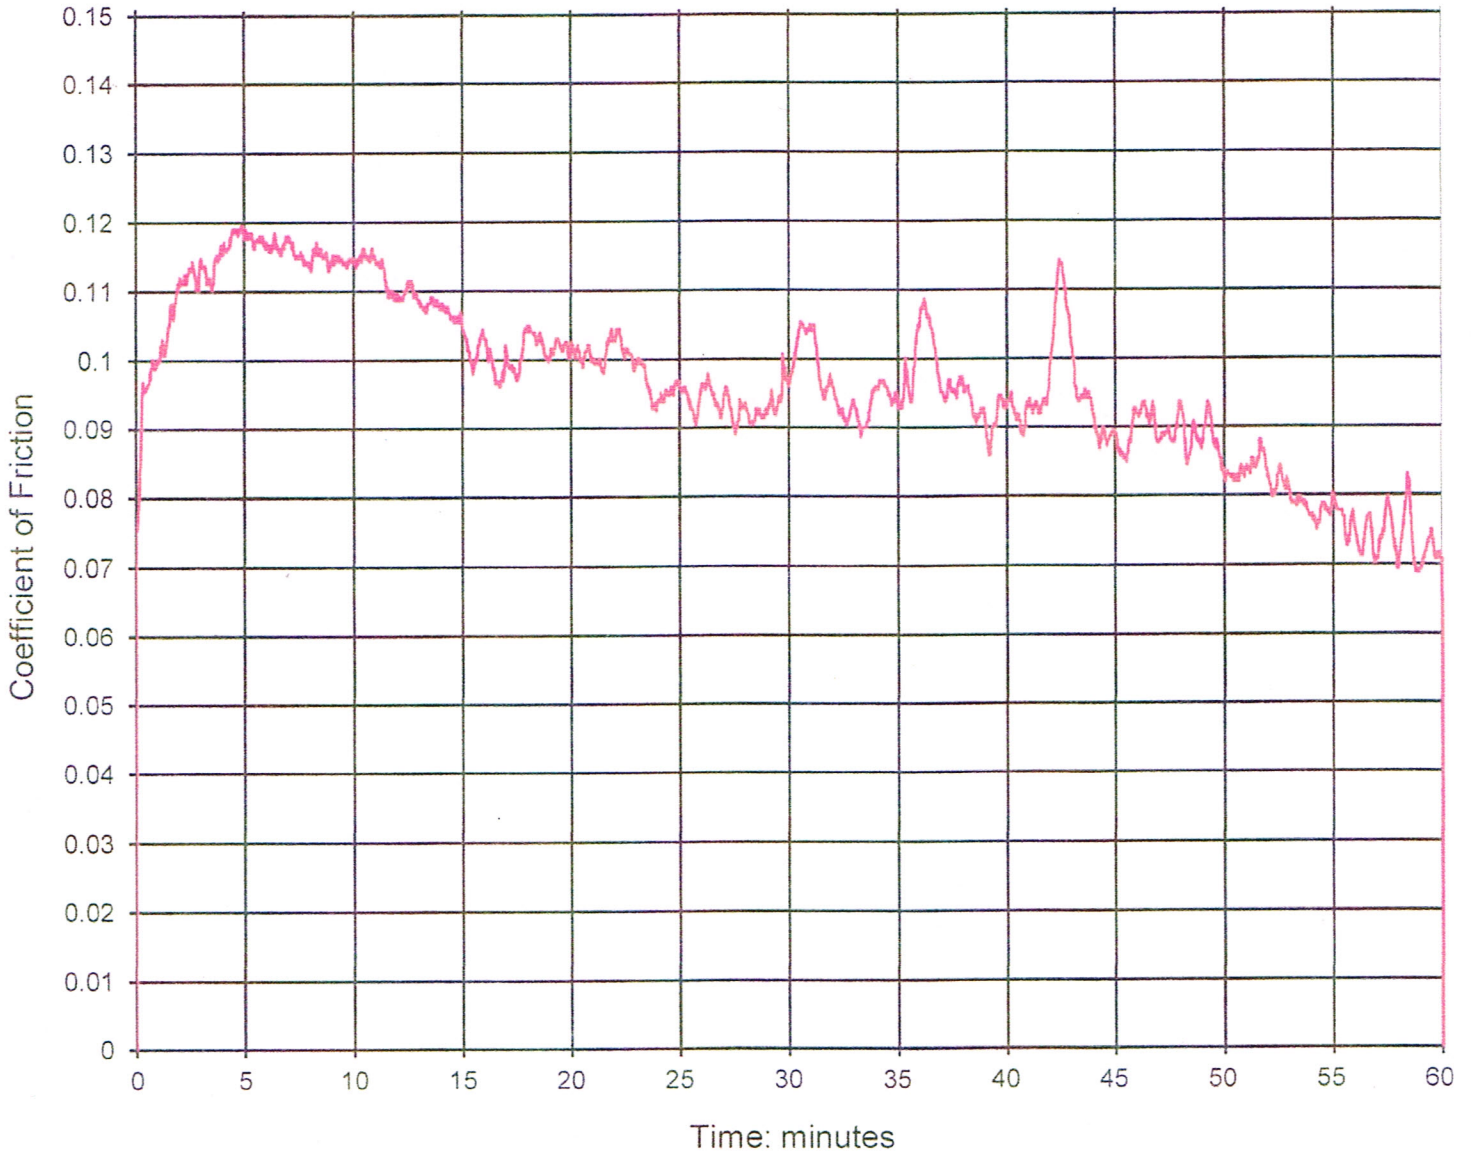

Method ASTM D4172 1200 RPM, 40 kg Load, 1 Hour @ 75°C  
Wear Scar = 0.49 mm Grand Average = 0.097 Y-O Intercept = 0.115